


TOTEM LED **OUTDOOR** BALTIMORE INOX PITCH 3.9 MEDIUM



FICHE TECHNIQUE

GARANTIE

36 MOIS*

*extension possible sur 60 mois


Fabrication du support en inox pour l'extérieur
Dimensions 2000x2000mm

CARACTÉRISTIQUES TECHNIQUES


MODULE SPECIFICATION			
Pixel Pitch	3.908mm	Optimal Viewing Distance	≥4 m
Pixel Configuration	SMD1921 copper wire	View Angle	Horizontal 140° Vertical 130°
Module Size	250mm x 250mm x 20mm	Colors Number	≥4398 Billion (synchronized)
Module Resolution	64*64=4 096 Dots	Refresh Rate	≥3840Hz
Module Weight	0.68 ±0.01 kg	Frame Frequency	60Hz
Module Power Consumption	≤45W	Input Voltage	AC220V/50Hz or AC110V/60Hz
CABINET SPECIFICATION		Defects Rate	≤0.0001
Cabinet Size(WxH)	500mm x 500mm	MTBF	>10,000 hours
Cabinet Resolution	128*128 =16384 Dots	Life span	≥100,000 hours(50% brightness)
Module Quantity	2 x 2 = 4 pcs	Humidity-operating	10%-90%
Pixel Density	65536Dots/m²	Temperature-operating	-20 °C - 40°C
Cabinet Material	Die-casting aluminum cabinet	Controlling system	Novastar
Cabinet weight	about 7.47kg/pcs	Operating System	Windows98/ me/2000/NT/XP
SCREEN PARAMETERS		Installation Mode	fixed installation or rental
Requested size	W2m*H2m=4sqm		
Cabinet quantity	W4*H4=16pcs		
Screen Resolution	16cabinets * 16384 Dots =262 144dots		
Brightness	≥5500 cd/m²		
Ingress Protection	IP65		





DIMENSIONS

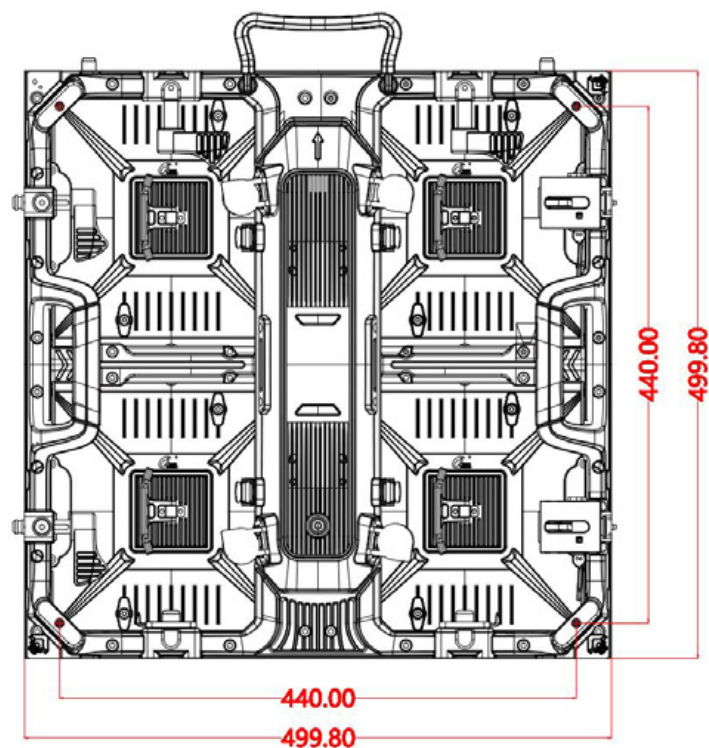

VUE AVANT



VUE ARRIÈRE



composition totem led outdoor vitrine



l'écran led de 2000x2000 mm est composé de :

